


RESIDENTIAL FOOTPATH PROFILE & ADJOINING BATTER

Scale 1:50

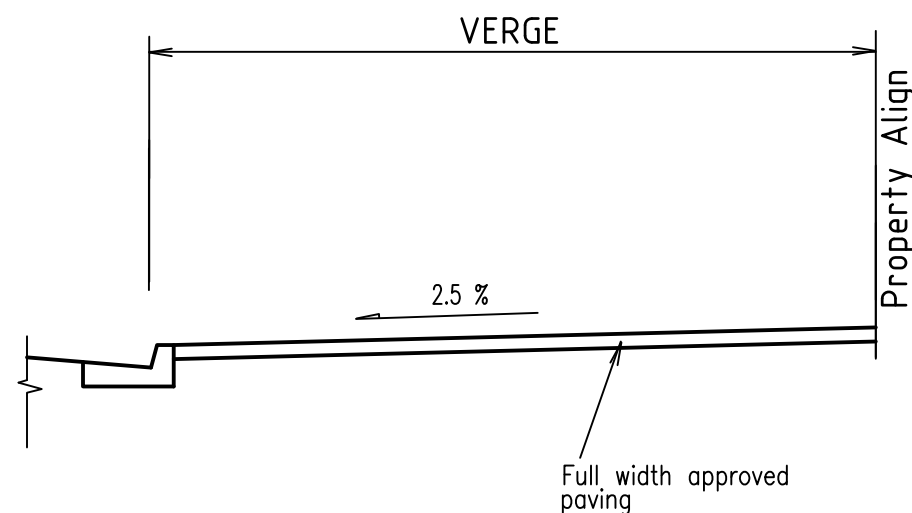

COMMERCIAL FOOTPATH PROFILE

NTS

NOTES

1. Where $h < 750$, a standard 3% footpath with 1 in 6 batter shall be adopted.
2. Where $h > 750$, a combination of 3% and + 5% Max. may be adopted for the footpath profile with 1 in 6 slopes in private property.
3. Where $B > 6000$ when adopting 1 in 6 batters they may be increased to 1 in 4 Max. with B constant at 6000.
4. Where $h > 1500$, 1 in 2 batters may be provided with access points to each property graded at 1 in 4.
(Not to be adopted unless approved by the Manager Infrastructure Development.
5. Provide Topsoil and Turfing as specified.
6. All grades are to conform with regard to accessibility to all members of the community.
7. Variations may be approved at the discretion of the Manager Infrastructure Development.
8. Paving type and pattern to be approved by Redland Shire Council.

C	UPDATED	3/10	
B	AMENDED	1/99	
A	ORIGINAL ISSUE	1/98	
REVISIONS		DATE	APPROVED

© REDLAND CITY COUNCIL

DISCLAIMER. The authors shall have no liability or responsibility to the user or any other person or entity with respect to any liability, loss or damage caused or alleged to be caused, directly or indirectly, by the adoption and use of these Standard Drawings including, but not limited to, any interruption of service, loss of business or anticipatory profits, or consequential damages resulting from the use of these Standard Drawings. Persons must not rely on these Standard Drawings as the equivalent of, or a substitute for, project-specific design and assessment by an appropriately qualified professional.



FOOTPATH PROFILE POLICY

ROAD/STREET
Standard
Drawing

R-RCC-5

A B C