


**Drake Canal (Location 1)**

- Removal of existing fishing platform, timber rail bollards and obsolete sign
- Installation of sandstone blocks for informal seating and garden area
- Stainless steel Webforge Monowills (or similar) handrail with kick rail to be installed (concrete hob not required). Refer reference image below:



**Raby Bay Foreshore Park (Location 2)**

- Construction of 2m wide concrete pathway connection between proposed 7.5m x 4.5m concrete pad and existing shared pathway
- Installation of seating
- Installation of bin on a concrete slab with enclosure (bin relocated from Drake Canal)

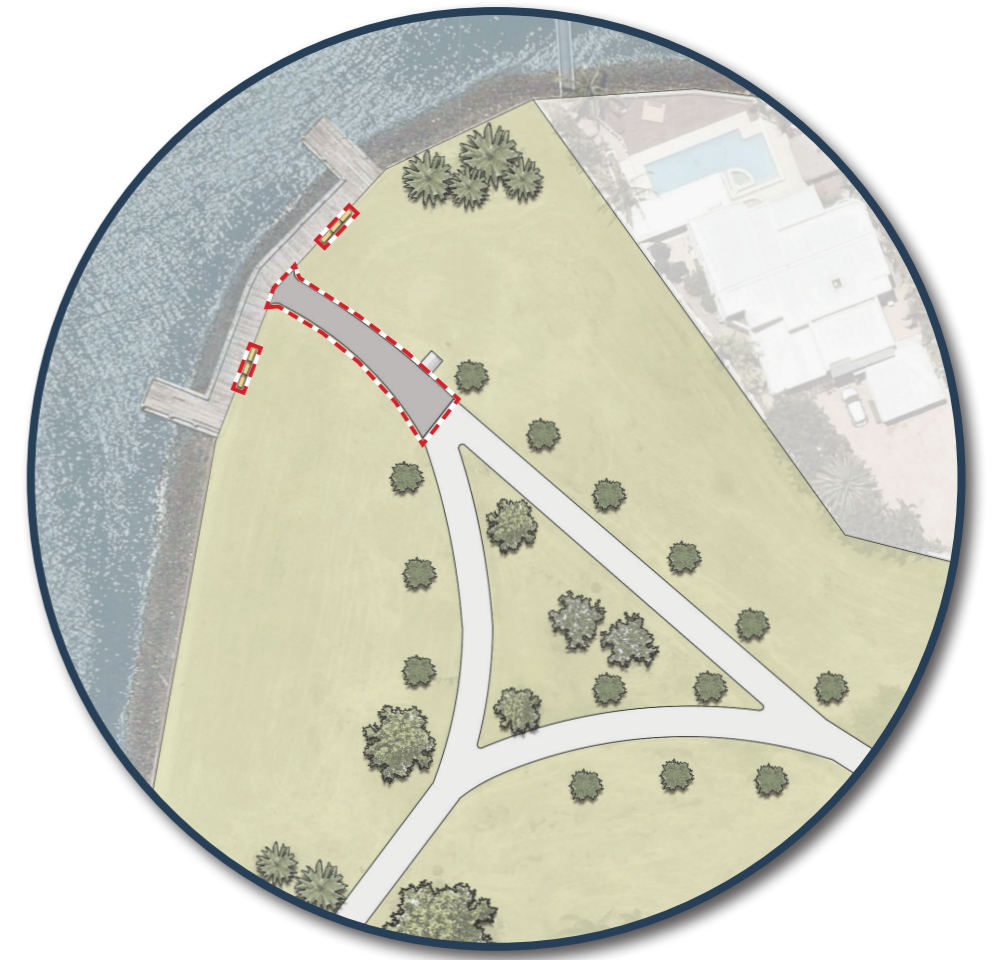

**Ross Canal (Location 3)**

- Construction of 3m wide concrete pathway connection between fishing platform and existing pathway. Pathway to adjoin with existing seat
- Installation of sandstone blocks for informal seating



Reference Image

